


Flachstecker DIN 46343 T1 –T4

unisoliert, Krallenform
Form A mit Rastzunge ohne Rastloch

Einzelausführung

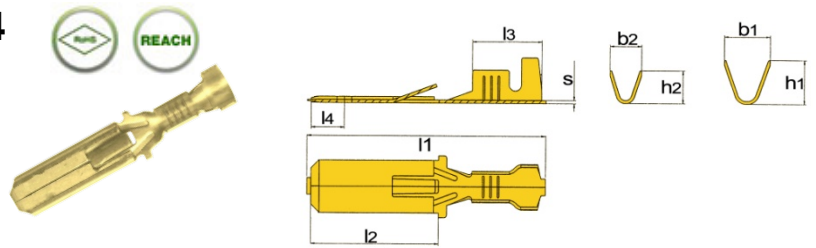


Solderless Receptacles, non-insulated

mm ² (AWG)	Bestell-Type	Bestell-Code	Nenn-Größe	– Dimensionen in mm –								VPE Menge	Werkzeug Tool	
				l ₁	l ₂	l ₃	l ₄	h ₁	h ₂	b ₁	b ₂			s
0,5 – 1,0 (20-18)	FS2-1005.8-	xx*	4,8x0,8	27	15	8,5		4,5	3,0	4,5	3	0,37	6.000	GRB-0560 GRB-0560L GRB-0560CL PWZ-2000D-1306
	FS2-1007.8-		6,3x0,8	28	15,5	8,5		4,5	3,0	4,5	3	0,37	4.000	
1,0 – 2,5 (18-14)	FS2-2505.8-	xx*	4,8x0,8	27	15	8,5		4,9	3,9	4,6	3,7	0,37	6.000	
	FS2-2707.8-		6,3x0,8	28	15,5	8,5		5,5	4	5,5	3,8	0,37	4.000	
2,5 – 6,0 (14-10)	FS2-4607.8-TWIN-Crimp max. 2x AWG16	xx*	6,3x0,8	28	15,5	8,5		5,8	6,5	4,0	5,5	0,37	4.000	

Flachstecker DIN 46343 T1 –T4

unisoliert, Krallenform
Form B mit Rastzunge und Rastloch

Einzelausführung

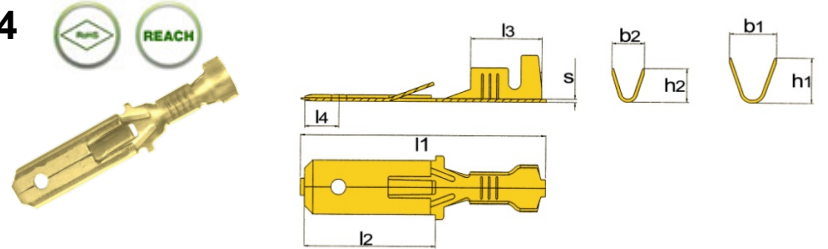

Solderless Receptacles, non-insulated

mm ² (AWG)	Bestell-Type	Bestell-Code	Nenn-Größe	– Dimensionen in mm –								VPE Menge	Werkzeug Tool	
				l ₁	l ₂	l ₃	l ₄	h ₁	h ₂	b ₁	b ₂			s
0,5 – 1,0 (20-18)	FS3-1003.8-	xx*	2,8x0,8	22	12,5	6	2,2	4,5	3,4	4,5	3,2	0,37	10.000	GRB-0560 GRB-0560L GRB-0560CL PWZ-2000D-1306
	FS3-1005.8-		4,8x0,8	27	15	8,5	3	4,5	3	4,5	3	0,37	6.000	
	FS3-1007.8-		6,3x0,8	28	15,5	8,5	4	4,5	3	4,5	3	0,37	4.000	
1,0 – 2,5 (18-14)	FS3-2507.8-	xx*	6,3x0,8	28	15,5	8,5	4	5,5	4	5,5	3,8	0,37	4.000	
2,5 – 6,0 (14-10)	FS3-4607.8-TWIN-Crimp max. 2x AWG16	xx*	6,3x0,8	28	15,5	8,5	4	5,8	6,5	4	5,5	0,37	4.000	

Bemerkung:

