

Ring-Kabelschuh DIN 46234

unisoliert und Sonderausführung

Temperaturbereich: bis +125°C

Solderless Terminals non-insulated




mm ² (AWG)	Bestell-Type	Norm	- Dimensionen in mm -							Werkzeug Tool
			s	d ₁	d ₂	d ₃	l ₁	l ₂	a	
0,14 – 0,5 (26-22)	RKS-0527	Werks- Norm	0,5	2,7	5,0	1,0	15,0	10,0	4,0	T 50 T 53 DKB 0325
	RKS-0532			3,2	5,0		15,0	10,0		
	RKS-0537			3,7	6,0		18,0	12,0		
	RKS-0543			4,3	6,5		18,5	12,0		
	RKS-0553			5,3	8,0		20,0	12,0		
0,5 – 1,5 (20-16)	RKS-1532	DIN UL CSA	0,8	3,2	5,5	1,7	12,0	9,2	5,0	T 50 T 53 DKB 0325
	RKS-1537			3,7	6,0		14,0	11,0		
	RKS-1541			4,1	6,0		13,9	10,5		
	RKS-1543			4,3	8,0		16,0	12,0		
	RKS-1551			5,1	8,0		15,6	11,6		
	RKS-1553			5,3	10,0		18,0	13,0		
	RKS-1561			6,5	10,0		18,0	13,0		
	RKS-1565			6,5	12,0		20,2	14,2		
	RKS-1581			8,4	12,0		20,2	14,2		
	RKS-1585			8,5	14,0		24,0	17,0		
	RKS-1510S			10,5	14,0		23,7	17,0		
	RKS-1510			10,5	18,0		26,3	18,0		
	1,1 – 2,6 (16-14)			RKS-2532	DIN UL CSA		0,8	3,2		
RKS-2537		3,7	6,0	14,0		11,0				
RKS-2541		4,1	6,8	15,0		11,6				
RKS-2543		4,3	8,0	16,0		12,0				
RKS-2551		5,1	8,0	16,0		12,1				
RKS-2553		5,3	10,0	19,0		14,0				
RKS-2565		6,5	11,0	21,5		16,0				
RKS-2585		8,5	14,0	24,0		17,0				
RKS-2510S		10,5	15,0	24,5		17,0				
RKS-2510		10,5	18,0	27,4		18,5				
RKS-2513		13,0	19,0	28,0		20,0				
RKS-2516		17,2	27,0	40,0		27,0				
2,7 – 6,0 (12-10)		RKS-4643	DIN UL CSA	1,0		4,3		8,0	3,6	18,0
	RKS-4653	5,3			10,0	20,0	15,0			
	RKS-4665	6,5			11,0	21,5	16,0			
	RKS-4685	8,5			14,0	26,0	19,0			
	RKS-4610	10,5			18,0	30,0	21,0			
	RKS-4612	13,0			18,0	30,0	21,0			
6 – 10 (8)	RKS.10-4	DIN VG UL CSA	1,1	4,3	10,0	4,5	21,0	16,0	8,0	GWB-4099 PWZ 2258 PWZ 2000D-1322 PWZ-1300
	RKS.10-5			5,3	10,0		21,0	16,0		
	RKS.10-6			6,5	11,0		22,5	17,0		
	RKS.10-8			8,4	14,0		27	20,0		
	RKS.10-10			10,5	18,0		30,0	21,0		
	RKS.10-12			13,0	22,0		34,0	23,0		
10 – 16 (6)	RKS.16-5	DIN VG UL CSA	1,2	5,3	10,0	5,8	25,0	20,0	10,0	PWZ-3165A1 PWZ-2400 PWZ-2800 PWZ 2000D-1516
	RKS.16-6			6,5	11,0		25,5	20,0		
	RKS.16-8			8,4	14,0		29,0	22,0		
	RKS.16-10			10,5	18,0		33,0	24,0		
	RKS.16-12			13,0	22,0		37,0	26,0		

Ring-Kabelschuh DIN 46234

unisoliert und Sonderausführung

Temperaturbereich: bis +125°C

Solderless Terminals non-insulated

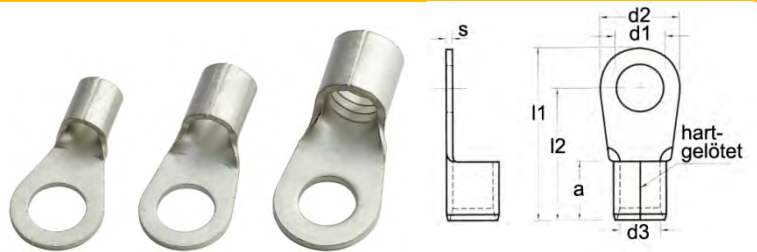

mm ² (AWG)	Bestell-Type	Norm	- Dimensionen in mm -							Werkzeug Tool						
			s	d ₁	d ₂	d ₃	l ₁	l ₂	a							
16 – 25 (4)	RKS.25-5	DIN UL CSA	1,5	5,3	12,0	7,5		31,0	25,0	11,0						
	RKS.25-6			6,5	12,0			31,0	25,0							
	RKS.25-8			8,4	16,0			33,0	25,0							
	RKS.25-10			10,5	18,0			35,0	26,0							
	RKS.25-12			13,0	22,0			42,0	31,0							
RKS.25-16	17,0		28,0	49,0	35,0											
25 – 35 (2)	RKS.35-6		DIN UL CSA	1,6	6,5	15,0	9,0		33,5	26,0		12,0	PWZ-1300			
	RKS.35-8				8,4	16,0			34,0	26,0						
	RKS.35-10				10,5	18,0			36,0	27,0						
	RKS.35-12			13,0	22,0	43,0	31,0	14,0	PWZ-2400							
	RKS.35-16	17,0		27,0	50,0	37,0										
RKS.35-20	21,0	30,0		52,0	37,3											
35 – 50 (1/0)	RKS.50-6	DIN UL CSA		1,8	6,5	18,0	11,0		43,0	34,0	16,0					
	RKS.50-8				8,4	18,0			43,0	34,0						
	RKS.50-10				10,5	18,0			43,0	34,0						
	RKS.50-12				13,0	22,0			47,0	36,0						
	RKS.50-16		17,0		28,0	54,0			40,0							
RKS.50-20	21,0		32,0	58,0	42,0											
50 – 70 (2/0)	RKS.70-6		DIN UL CSA	2,0	6,5	22,0	13,0		49,0	38,0	18,0					
	RKS.70-8				8,4	22,0			49,0	38,0						
	RKS.70-10				10,5	22,0			49,0	38,0						
	RKS.70-12				13,0	22,0			49,0	38,0						
	RKS.70-16	17,0			28,0	56,0			42,0							
RKS.70-20	21,0	32,0		58,0	45,0											
70 – 95 (3/0)	RKS.95-8	DIN UL CSA		2,5	8,4	24,0	15,0		54,0	42,0	20,0	PWZ-2400				
	RKS.95-10				10,5	24,0			54,0	42,0						
	RKS.95-12				13,0	24,0			54,0	42,0						
	RKS.95-16				17,0	28,0			58,0	44,0				PWZ-2800		
	RKS.95-20		21,0		32,0	64,0			52,0							
95 – 120 (6)	RKS.120-8		DIN UL CSA	3,0	8,4	24,0	16,5		56,0	44,0	22,0					
	RKS.120-10				10,5	24,0			56,0	44,0						
	RKS.120-12				13,0	24,0			56,0	44,0						
	RKS.120-16				17,0	28,0			62,0	48,0						
	RKS.120-20				21,0	32,0			68,0	53,0						
120 – 150 (250-300)	RKS.150-10	DIN UL CSA		3,2	10,5	30,0	19,0		65,0	50,0	24,0					
	RKS.150-12				13,0	30,0			65,0	50,0						
	RKS.150-16				17,0	30,0			65,0	50,0						
	RKS.150-20				21,0	36,0			76,0	63,0						
150 – 185 (300-350 MCM)	RKS.185-10			DIN UL CSA	3,5	10,5	36,0	21,0		68,0	50,0			28,0	PWZ-2800	
	RKS.185-12		13,0			36,0				68,0	50,0					
	RKS.185-16		17,0			36,0				68,0	50,0					
185 – 240 (350-450 MCM)	RKS.240-10		DIN UL CSA		4,0	10,5	38,0	23,5		75,0	56,0		32,0			
	RKS.240-12					13,0				38,0	75,0					56,0
	RKS.240-16					17,0				38,0	75,0					56,0

Material: Elektrolytkupfer, galvanisch verzinkt, hartverlötet, RoHS konform

Charakteristik: Rillenprägung im Hülsenbereich

Weitere Größen und Abmessungen auf Anfrage. Maßänderungen im Sinne des technischen Fortschritts vorbehalten.